

# COMBiLiFT

Customised Handling Solutions

**C10,000 - C12,000**

*making short work of long loads*



*forward/reverse mode*



*carousel mode*



*sideward mode*




**three machines in one**

*- counterbalance forklift - sideloader - aisle truck*

[www.COMBiLiFT.COM](http://www.COMBiLiFT.COM)

# SPECIFICATIONS

## Model C10,000 - C12,000

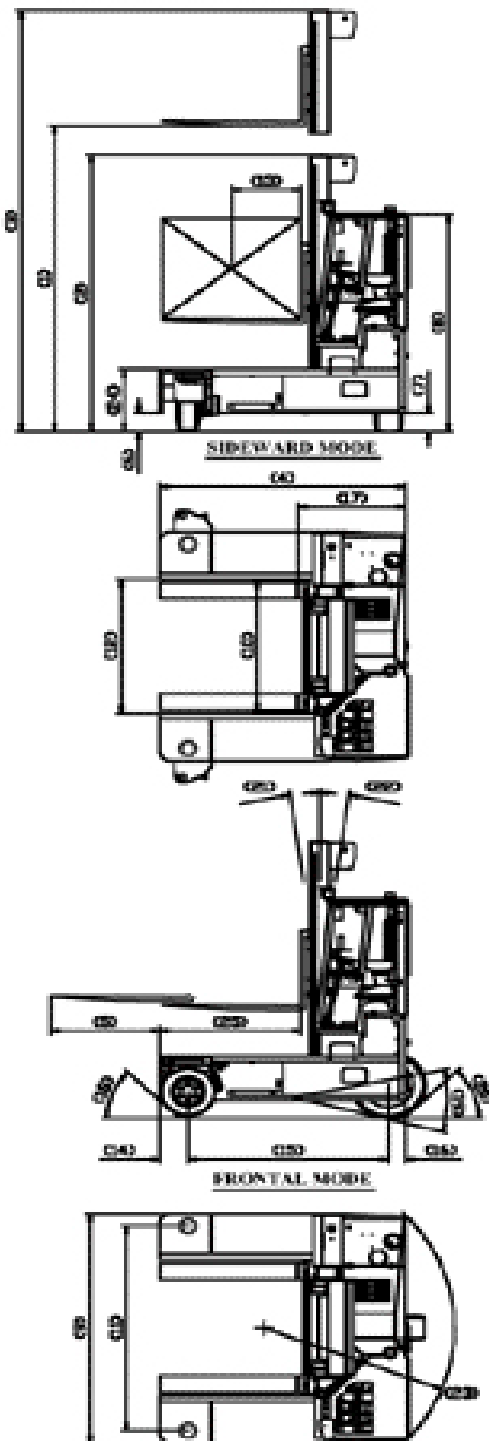

| REF | DESCRIPTION                             | C10,000          | C12,000   |
|-----|---|------------------|-----------|
| 1a  | Max. Lift Height                        | 4100mm           |           |
| 1b  | Free Lift Height                        | 0mm              |           |
| 2   | Height Mast Closed                      | 3450mm           |           |
| 3   | Max.(Mast raised)                       | 5800mm           |           |
| 4   | Overall Length                          | 3070mm           |           |
| 5   | Mast Travel                             | 1730mm           |           |
| 6   | Ground Clearance Under Mast             | 290mm            |           |
| 7   | Ground Clearance to Center of Wheelbase | 165mm            |           |
| 8   | Height of Cab                           | 2590mm           |           |
| 9   | Width                                   | 2800mm           |           |
| 10  | Outside Spread of Fork Arms             | 1600mm           |           |
| 11  | Track Front                             | 2500mm           |           |
| 12  | Frame Opening                           | 1650mm           |           |
| 13  | Load Center Distance                    | 600mm            |           |
| 14  | Overhang Front                          | 307mm            |           |
| 15  | Wheel Base                              | 2555mm           |           |
| 16  | Overhang Back                           | 208mm            |           |
| 17  | Length From Face of Fork                | 1380mm           |           |
| 18  | Approach Angle                          | 45°              |           |
| 19  | Ramp Angle                              | 29°              |           |
| 20  | Departure Angle                         | 45°              |           |
| 21  | Forward Tilt                            | 3°               |           |
| 22  | Backward Tilt                           | 5°               |           |
| 23  | Minimum Outside Radius                  | 2300mm           |           |
| 24  | Platform Height                         | 710mm            |           |
| 25  | Platform Length                         | 1690mm           |           |
| A   | Capacity                                | 10,000kg         | 12,000 kg |
| B   | Unladen Weight                          | 14,000kg         | 14,200kg  |
| C   | Maximum Ground Speed                    | 14 km/h          |           |
| D   | Gradability                             | 15%              |           |
| E   | Diesel / LPG Water Cooled Engine        | 62kW / 72kW      |           |
| F   | Electric's                              | 12 Volt          |           |
| G   | Fork Section                            | 65 x 250 x 1690  |           |
| H   | 22x12x16 Front Tyre (Solid Rubber)      | OD560 / Width305 |           |
| I   | 840 / 350-559 Rear Tyre (Solid Rubber)  | OD840 / Width350 |           |
| J   | Standard Color                          | Green & Grey     |           |
| K   | Suspension Seat                         | KAB Model 211    |           |

### FEATURES INCLUDE:

- Rubber Mounted Half Cabin with Top, Front, Side and Rear Glass
- Multi – Direction Operation
- 3 Wheel Hydrostatic Drive
- Load Sensing Steering
- 4 way lever Positioning of Wheels

### Compare the options

|                  | Outside | Inside | 4-Way |
|------------------|---------|--------|-------|
| <b>COMBiLiFT</b> | ✓       | ✓      | ✓     |
| 4-Way Electric   | ×       | ✓      | ✓     |
| Counterbalance   | ✓       | ✓      | ×     |
| Side Loader      | ✓       | ×      | ×     |

### Distributed By

**COMBiLiFT Ltd**  
Co.Monaghan  
Ireland  
**Tel:** ++ 353 47 80500  
**Fax:** ++ 353 47 80501  
**info@combilift.com**